

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Modi Active Blast Chiller

**Model:** W10A

**Cod:** W11106000001



### Technical data

<b>Top:</b>	4 cm thickness
<b>Gross capacity:</b>	367 lt
<b>Temperature range:</b>	-40°+65°C
<b>Ventilation range:</b>	25% - 100%
<b>Humidifier:</b>	Not available
<b>Refrigerant unit:</b>	Plug-in
<b>Yield +90 / +3:</b>	50 Kg
<b>Yield +90 / -18:</b>	40 Kg
<b>Climate class:</b>	5
<b>Cooling gas:</b>	R452a
<b>Defrost:</b>	Hot gas
<b>Valve:</b>	Electronic expansion valve
<b>Dimensions (mm):</b>	780×800×1563 mm
<b>Packing dimensions:</b>	875×915×1826 mm
<b>Gross weight:</b>	190 Kg
<b>Voltage:</b>	400-415 V - 50-60 Hz
<b>Total rate:</b>	5120 W
<b>Absorbed Current:</b>	12,74 A
<b>Cooling capacity:</b>	5440 W*
<b>*:</b>	Evap. -10°C Cond. +45°C

### Features

<b>Functions:</b>	Blast chilling, shock freezing, thawing, proving, holding, desiccation, chocolate, manual cycle
<b>Standard equipment:</b>	10 slides GN1/1, EN60x40
<b>Control:</b>	4,3" touch screen display with USB port
<b>Doors:</b>	Cushioned, with anti-odor system
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Core probe:</b>	Needle probe with 1 reading point, quick-release and easily replaceable
<b>Insulation:</b>	60 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Exterior and interior AISI 304 stainless steel.
<b>Inner corners:</b>	Rounded for easy cleaning and ensuring maximum hygiene
<b>Handle:</b>	Stainless steel AISI 304, 2 mm thick
<b>Racks and slides:</b>	Stainless steel AISI 304, quick release
<b>Feets:</b>	AISI 304 stainless steel adjustable h 100/150 mm
<b>Cosmo:</b>	Wi-Fi remote control system

## Accessories and variants


RAL customisable colouring  
 Sonda al cuore a 3 punti di lettura  
 Sonda al cuore riscaldata a 1 punto di lettura  
 Inversione apertura porta  
 Single-phase 50Hz power supply or 60Hz  
 Three phase 50Hz power supply or 60Hz  
 Other special voltage  
 Lowered foot h 55/70 mm  
 4 Swivel and brake castors h 128 mm  
 Stainless steel shelf GN1/1  
 Plastic coated shelf GN1/1  
 Stainless steel shelf EN60x40  
 Plastic coated shelf EN60x40  
 Pair of type L slides 398 mm GN-EN  
 Sterilizing UV lamp (U version)

## COSMO - wi-fi control

Cosmo is the wi-fi technology that allows MODI blast chillers to be connected, updated and monitored from smartphones. MODI is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

\*The installation requires a kit for the replacement of the racks

## Technical draw

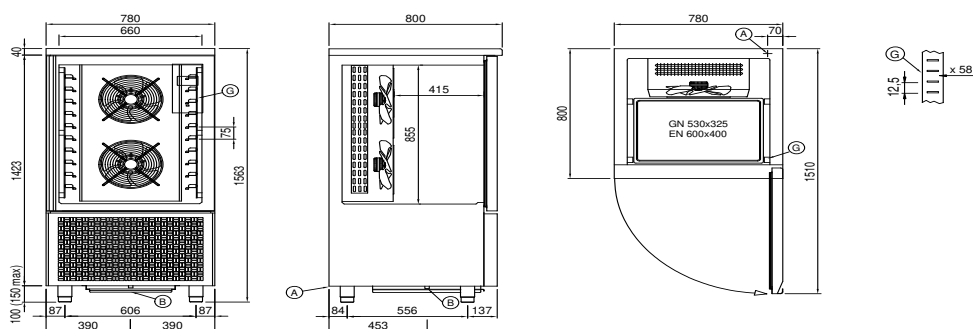

**A:** Power supply cable outlet

**B:** Condensation water drain

**G:** Racks pitch

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.