

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_



## Vision F Blast Chiller

**Model:** W10F

**Cod:** W64103000001

### Technical data

<b>Top:</b>	4 cm thickness
<b>Max capacity:</b>	20 trays GN1/1, EN60x40 h 20 mm
<b>Gross capacity:</b>	367 lt
<b>Temperature range:</b>	-40°+65°C
<b>Ventilation range:</b>	25% - 100%
<b>Humidity range:</b>	45% - 95% with humidifier
<b>Humidifier:</b>	Including
<b>Refrigerant unit:</b>	Plug-in
<b>Yield +90 / +3:</b>	50 Kg
<b>Yield +90 / -18:</b>	40 Kg
<b>Climate class:</b>	5
<b>Cooling gas:</b>	R452a
<b>Defrost:</b>	Hot gas
<b>Valve:</b>	Electronic expansion valve
<b>Dimensions (mm):</b>	780×859×1563 mm
<b>Packing dimensions:</b>	875×915×1826 mm
<b>Gross weight:</b>	195 Kg
<b>Voltage:</b>	400-415 V - 50-60 Hz
<b>Total rate:</b>	5120 W
<b>Absorbed Current:</b>	12,74 A
<b>Cooling capacity:</b>	5440 W*
<b>*:</b>	Evap. -10°C Cond. +45°C

### Features

<b>Functions:</b>	Blast chilling, shock freezing, thawing, proving and retarder prover, holding, desiccation, chocolat
<b>Standard equipment:</b>	10 slides GN1/1, EN60x40
<b>Control:</b>	7" touch screen display with USB port
<b>Doors:</b>	Cushioned, with anti-odor system
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Core probe:</b>	Needle probe with 1 reading point, quick-release and easily replaceable
<b>Insulation:</b>	60 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Exterior and interior AISI 304 stainless steel. Internal and external in "linen canvas" steel
<b>Inner corners:</b>	Rounded for easy cleaning and ensuring maximum hygiene
<b>Handle:</b>	In AISI 304 stainless steel
<b>Racks and slides:</b>	Stainless steel AISI 304, quick release
<b>Feets:</b>	AISI 304 stainless steel adjustable h 100/150 mm
<b>Cosmo:</b>	Wi-Fi remote control system

## Accessories and variants

RAL customisable colouring

Sonda al cuore a 3 punti di lettura

Sonda al cuore riscaldata a 1 punto di lettura

Inversione apertura porta

Single-phase 50Hz power supply or 60Hz

Three phase 50Hz power supply or 60Hz

Other special voltage

Purity C Quell ST 50 filter cartridge

Lowered foot h 55/70 mm

4 Swivel and brake castors h 128 mm

Stainless steel shelf GN1/1

Plastic coated shelf GN1/1

Stainless steel shelf EN60x40

Plastic coated shelf EN60x40

Pair of type L slides 398 mm GN-EN

Pair of type L slides 398 mm EN

Sanitizing detergent

Touch screen kit for storage device control


Cosmo connection kit

### COSMO - wi-fi control

Cosmo is the wi-fi technology that allows VISION blast chillers to be connected, updated and monitored from smartphones. VISION is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

\*The installation requires a kit for the replacement of the racks

## Technical draw

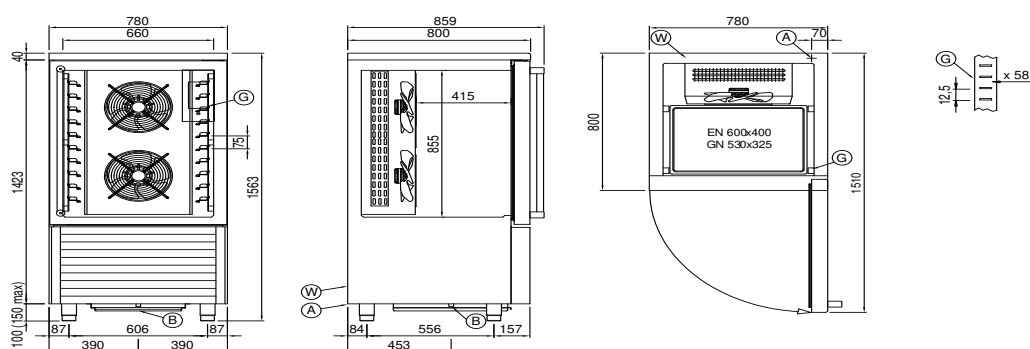

**A:** Power supply cable outlet

**B:** Condensation water drain

**G:** Racks pitch

**W:** Water mains connection for humidifier - 3/4" female. Unloading not required

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.